

PROJECT: \_\_\_\_\_ FIRM: \_\_\_\_\_ ORDER #: \_\_\_\_\_ TYPE: \_\_\_\_\_ QTY: \_\_\_\_\_



**XTR Driver 4000™** is a specialized module that powers continuous runs (up to 700'/213m) of high intensity linear LED fixtures. XTR Driver 4000 features a 220V-277VAC power input, a clear display for control input selection and up to 4000W of high voltage DC output power. The following control formats are all supported: DMX-512A, DALI or 0-10V/1-10V. All connected linear LED fixtures must conform to the Acclaim Lighting XTR Link standard.

## AT A GLANCE

<b>Power input</b> 220 to 277VAC 50/60Hz	<b>Power output</b> 380VDC 4000W (two ports)	<b>Temperature</b> -14° F to 131° F -10° C to 55° C	<b>Protection</b> Ingress: <b>IP20</b> Impact: <b>IK02</b>	<b>Core technology</b> 
--	---	---	--	----------------------------

## SPECIFICATIONS

<b>Power input</b>	220-277VAC, 50/60Hz
<b>Power output</b>	4000W, 380VDC 10.5A maximum
<b>Control input</b>	DMX + RDM, DALI, 0-10V Sink (noted as 1-10V), 0-10V Source
<b>Compatibility</b>	XTR Link fixtures: Linear XTR, Linear XTR Direct View and/or Terra Linear
<b>Mounting</b>	Wall mount: 4x Ø0.65" (Ø16.5 mm) surface mount holes
<b>Material / finish</b>	Aluminum / black powder coat
<b>Ambient temperature range</b>	-14° F to 131° F (-10° C to 55° C)
<b>Ingress protection</b>	IP20, dry location
<b>Impact protection</b>	IK02, protection against 0.20 joule impact
<b>Fixture connectors</b>	<b>Control inputs:</b> Terminal blocks <b>Outputs:</b> 2 x composite quick lock connectors, IP67
<b>Warranty</b>	5 years, limited
<b>Weight</b>	21 lbs (9.52 kg)
<b>Dimensions</b>	<b>WxHxD:</b> 12.2" x 23.62" x 3.35" (310 x 600 x 85mm) - see page 2
<b>Certifications</b>	




## ORDER CODE

**XTRD4000**


PROJECT \_\_\_\_\_ FIRM \_\_\_\_\_ ORDER # \_\_\_\_\_ TYPE \_\_\_\_\_ QTY \_\_\_\_\_

## DIMENSIONS

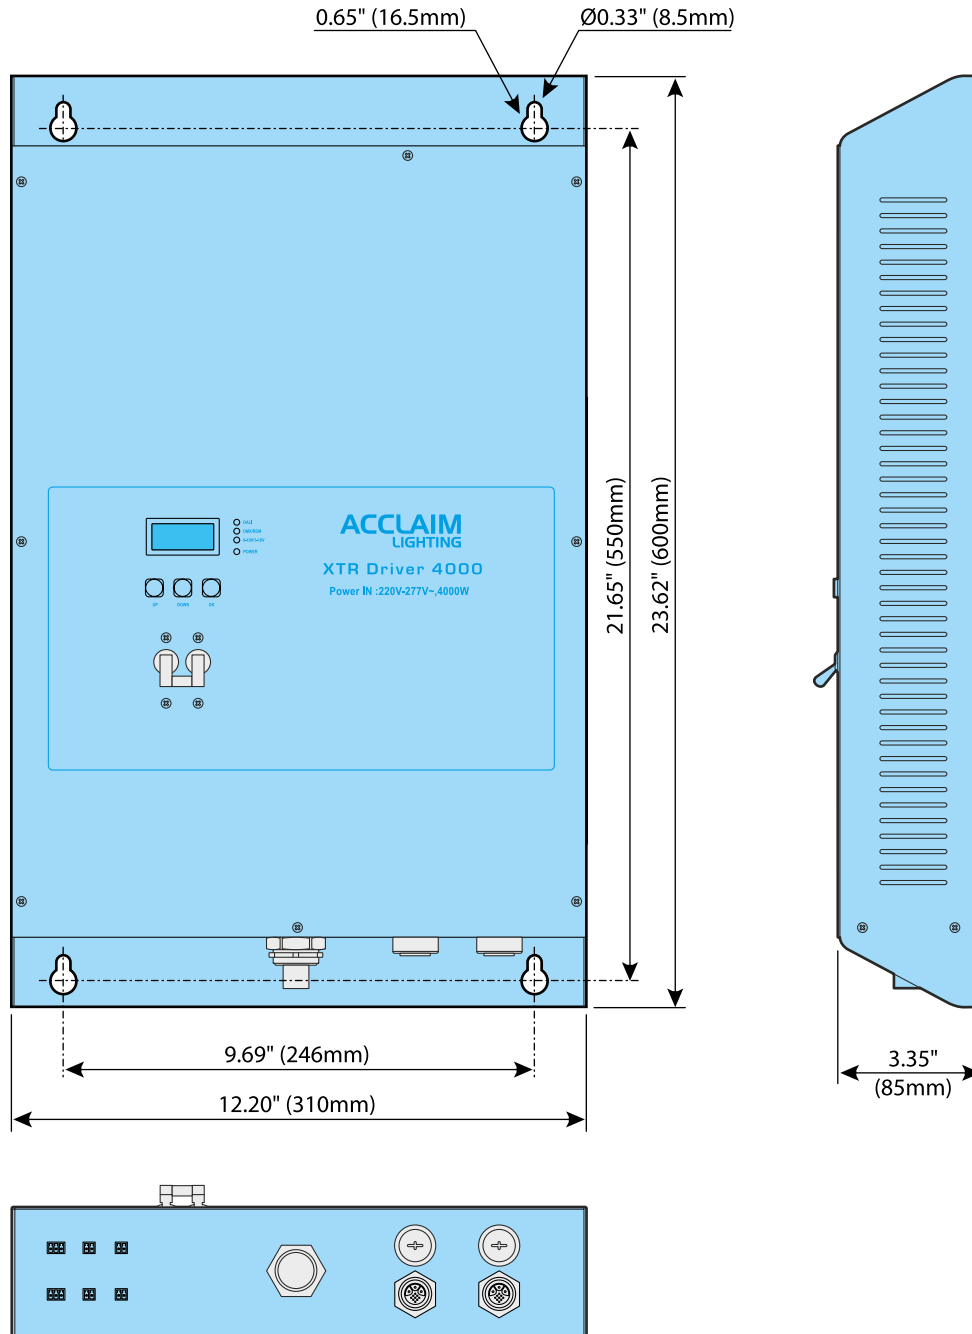


PROJECT \_\_\_\_\_ FIRM \_\_\_\_\_ ORDER # \_\_\_\_\_ TYPE \_\_\_\_\_ QTY \_\_\_\_\_

## IMPORTANT CABLING CONSIDERATIONS



- Wherever possible, XTR cable runs should be positioned to make them beyond normal reach within any installation.
- For long cable runs, external runs and in areas where public contact and/or accidental damage is possible, the XTR cabling should be contained within protective conduit. Minimum spec: Schedule 40, 1.5" (ID: Ø1.61", OD: Ø1.74").
- Additional power cabling: Where power feeds require additional non-XTR cabling, the power cores should be 14 AWG minimum.
- Additional DMX control cabling: For initial control runs leading to the XTR cabling, these are recommended:
  - Indoor exposed or inside conduit above grade: .....Belden 9842
  - Indoor plenum: .....Belden 82842
  - Outdoor exposed, direct burial, or inside conduit below grade: .....Belden 3107DB
- Please consult and adhere to all relevant local codes.
- The table below provides details about maximum run lengths for Linear XTR installations. It should be noted that those limits are imposed only by the power characteristics. The length of the DMX control feed to the first fixture could be up to the usual DMX standard limit (3,900 feet/1200m) with appropriate cable choice - although Acclaim Lighting recommends a maximum DMX / RDM control run length of 1,500' (457m) without buffering.

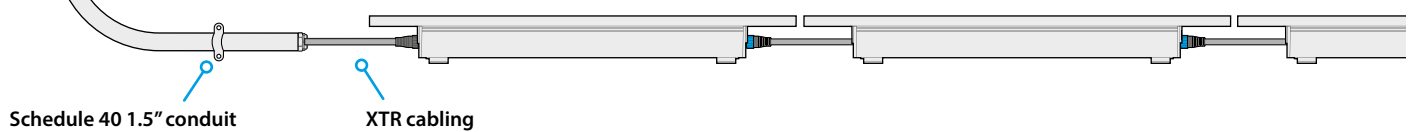

## RUN LENGTHS

Linear XTR, Linear XTR DV and/or Terra Linear fixtures connected to XTR Driver 4000

Model	Fixture power	Maximum length of fixtures in a single run
LO	2.5W per foot	700' (213m)
EO	5W per foot	700' (213m)
SO	12W per foot	300' (91.5m)
HO	20W per foot	150' (45m)

### Notes:

- All fixtures connected to a driver are controlled within a single DMX universe.
- The maximum overall length of a single run (fixtures + all cabling) must not exceed 800' (243m).

For full installation details, please refer to the **user guide**, available for free download here: